
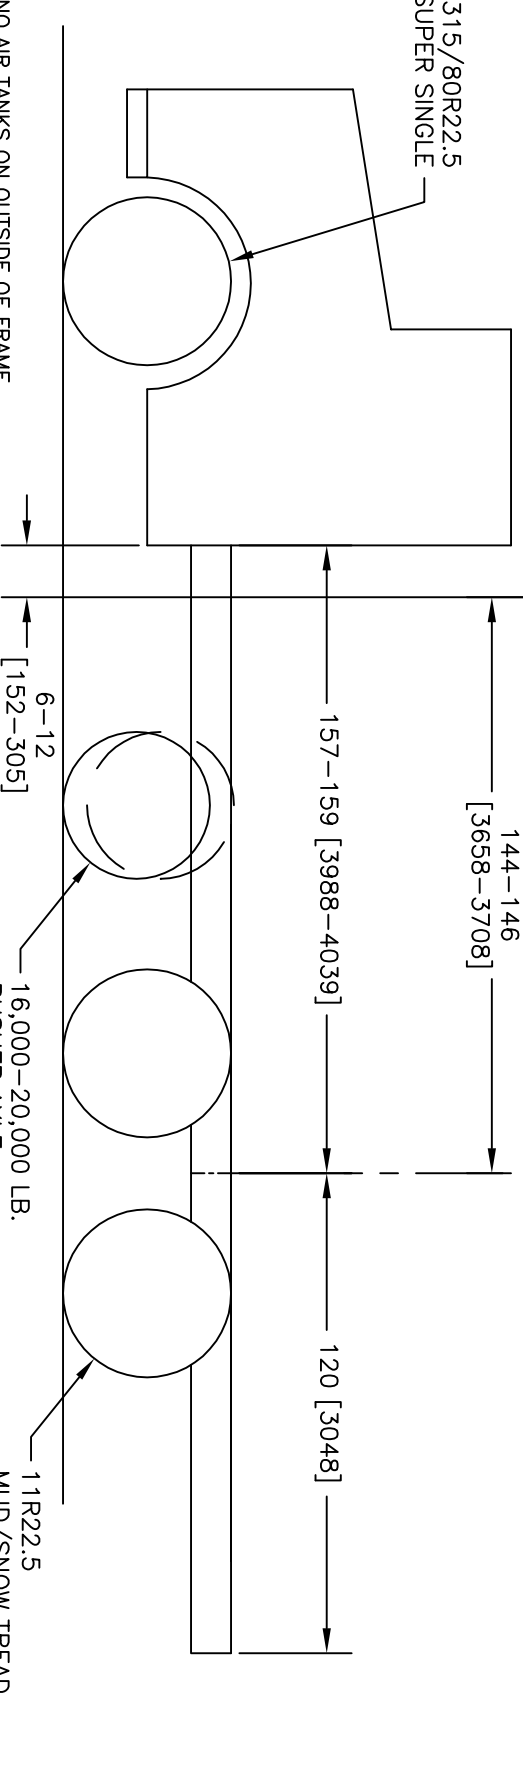


REV | DESCRIPTION | BY | DATE

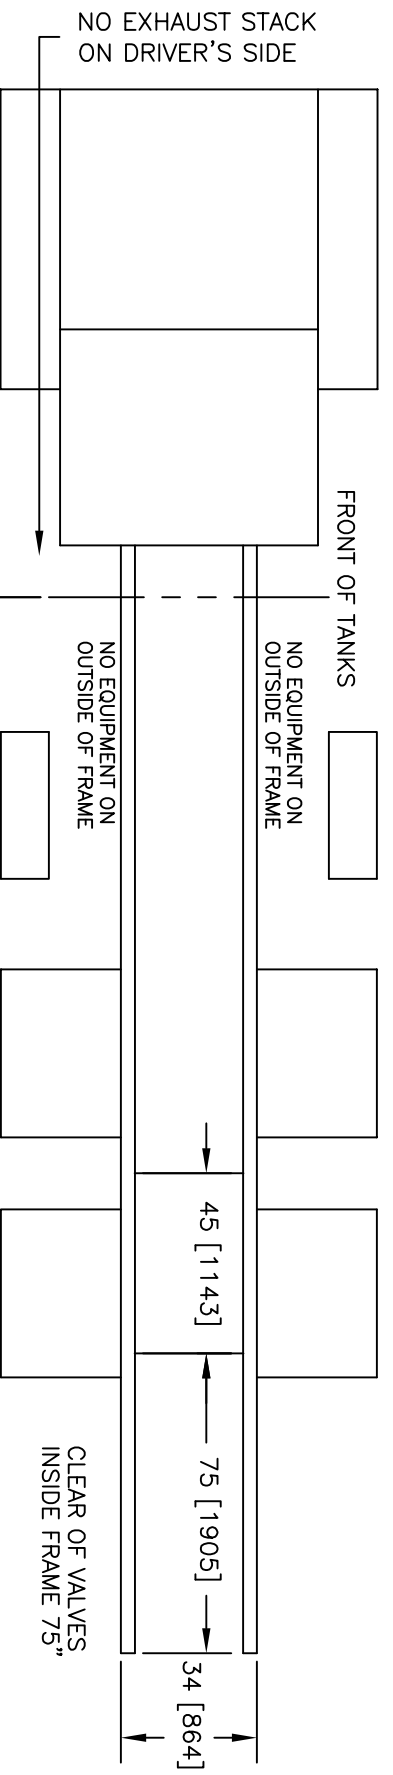

NO AIR TANKS ON OUTSIDE OF FRAME
 NEED 276" [7010] OF CLEAR AND STRAIGHT FRAME TO MOUNT MACROPAPER
 FUEL TANK MAY NEED TO BE MOVED IF LOCATED IN BACK OF CAB
 INSIDE FRAME AT REAR SHOULD BE CLEAR OF ALL EQUIPMENT
 FRONT AXLE CAPACITY: 20,000 LB [9072 KG], REAR AXLE CAPACITY: 46,000 LB [20865 KG]
 ENGINE: 300 HP MIN. REAR AXLE RATIO: 4.75:1 TO 5.25:1
 SLURRY PRODUCTION SPEED RANGE REQ'D: 2.5-4.5 MPH (4.0-7.25 KPH) @ 1200-1500 RPM IN LOWEST TWO GEARS

DIMENSIONS IN [] ARE IN MILLIMETERS

www.slurry.com
 13024 LAKE RD., P.O. BOX 178, HICKMAN, CA 95323
 PH. (209) 874-2357 FAX (209) 874-1174

This drawing is the property of Reed International, Inc., DBA VSS Macropaver. It includes the principles of design, is the property of Reed Int. and is submitted with the agreement that it is not to be reproduced, copied, or loaned, in any part or whole. It is not to be used in any manner that may constitute a detriment directly or indirectly to Reed International. Acceptance of this drawing is an agreement to the above.

TITLE:	MACROPAPER 12D	REVISION:	A	EQUIPMENT REF:	MACRO12B
SIZE:	A	DATE:	2/4/13	DRAWING NUMBER:	MB240203-P
SCALE:	48:1	SHEET:	1 OF 1		